

Superior quality since
1984

Owners Manual

PEDESTAL DRILL PRESS

BORUM

INDUSTRIAL WORKSHOP EQUIPMENT

**INDUSTRIAL
QUALITY**



Specifications:

- Motor: 240V 1HP
- Number of Speeds: 16
- Spindle Speeds: 162-3160rpm
- Maximum Drilling Capacity: 20mm
- Spindle Taper: MT2
- Chuck: 16mm
- Maximum Spindle Stroke: 82mm
- Swing: 430mm
- Maximum Distance from Spindle to Table: 775mm
- Maximum Distance from Spindle to Base: 1270mm
- Diameter of Column: 80mm
- Diameter of Table: 350mm
- Size of Base: 460 x 270mm
- Overall Height: 1625mm
- Weight: 85kg

About the Borum brand

Our **“heavy duty commercial”** range of Borum Industrial equipment has been manufactured to exacting standards for the past **34 years**. We specify industrial quality components and design to ensure a long and durable working life in **commercial transport, mining, earthmoving and railway** environments. Our Borum Industrial range of equipment is focused on achieving superior professional standards, reliability, quality, and are covered by a **12 month trade use warranty**.

Made in China to TQB Brands Pty Ltd specifications
Visit us at www.tqbbrands.com.au

WARNING INFORMATION



IMPORTANT: READ ALL INSTRUCTIONS BEFORE USE

 **WARNING**

The instructions and warnings contained in this manual should be read and understood before using or operating this equipment. Do not allow anyone to use or operate this equipment until they have read this manual and have developed a thorough understanding of how this equipment works. Failure to observe any of the instructions contained in the manual could result in severe personal injury to the user or bystanders, or cause damage to the equipment and property. Keep this manual in a convenient and safe place for future reference.

The warnings, cautions and instructions discussed in this instruction manual cannot cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.

Whilst every effort has been made to ensure accuracy of information contained in this manual, the Borum policy of continuous improvement determines the right to make modifications without prior warning.

CONTENTS

| | |
|--|----|
| WARNING INFORMATION..... | 1 |
| CONTENTS..... | 1 |
| STANDARD OPERATING PROCEDURE | 2 |
| ASSEMBLY, OPERATION, PREVENTITIVE MAINTENANCE..... | 3 |
| PARTS LIST..... | 9 |
| PARTS DIAGRAM | 10 |
| TROUBLESHOOTING..... | 11 |
| WARRANTY..... | 12 |

STANDARD OPERATING PROCEDURE

DO NOT use this machine unless you have been trained and assessed to a competent level in its safe use and operation, and have been given permission to use this



Safety glasses must be worn when operating this equipment



Long loose hair must be contained when operating this equipment



Safety footwear must be worn when operating this equipment



Close fitting/protective clothing must be worn when operating this equipment



Rings and jewellery must not be worn when operating this equipment



Hearing protection must be worn where noise levels are in excess of 85 dB(A) occupational exposure limit



Gloves must not be worn when machine is operating. Machine to be at standstill if gloves required for manual

PRE-OPERATIONAL SAFETY CHECKS

1. Keep guards in place and in good working order
2. Keep drill press in good working order, follow lubricating and changing accessories instructions
3. Use recommended accessories only, failure to do so may damage the drill press and/or may risk injury
4. Remove adjusting keys & wrenches from the drill press before operating
5. Ensure the switch is in the OFF position before starting the drill press
6. Disconnect drill press before performing any maintenance
7. Keep work area clean, free from hazards and well lit.
8. Only use the drill press for its intended purpose.
9. Wear the correct PPE clothing.
10. Secure work using clamps or vice where practical.
11. Do not overreach, keep proper footing and balance at all times while operating the drill press
12. Never leave drill press running unattended, always lock the "on - off" switch when not in use
13. Use only on hard level surfaces capable of sustaining the load.
14. Ensure that risk assessment has been read.
15. Check workspace and walkways to ensure no slip-hazards are present.
16. Faulty equipment must not be used. Immediately report suspect equipment.

OPERATIONAL SAFETY CHECKS

1. Never leave the machine running unattended.
2. Before making adjustments or before cleaning sward accumulations switch off and bring the machine to a complete standstill.
3. Ensure that the work piece is securely held in a clamped work vice or clamped directly to the table.
4. Feed downwards at a sufficient rate to keep the drill cutting.
5. Feed with care as the drill breaks through the underside of the work.
6. Use a safe working posture (beware of hair catching).

HOUSEKEEPING

1. Switch off the machine.
2. Return all tooling and fixtures to the correct storage location.
3. Display a completed "Equipment in Use" notice if the machine is set up and/or in use but unattended.
4. Leave the machine and work area in a safe, clean and tidy state after job is completed.
5. Return surplus material to stock and dispose of waste material in an appropriate recycling or waste bin.

POTENTIAL HAZARDS

- Hair/clothing entanglement – rotating spindle/drill
- Eye injuries
- High noise levels when drilling some materials
- Removal or modification of safety devices
- Flying swarf/chips
- Sharp edges and burrs
- Distracting operator
- Using equipment with lapsed test tag

ASSEMBLY, OPERATION, PREVENTITIVE MAINTENANCE

1. FEATURES & MODELS

This "Borum Industrial Drill Press" delivers precision and power... and is designed to handle the demands of a professional workshop environment. With a powerful long-life industrial quality 3/4 HP motor (that's fully enclosed in a durable metal hood) double-wide spindle bearings and a precision spindle, this is one very reliable drilling machine.

Equipped with 16 drilling speeds from 162 to 3,000rpm and a 16mm drilling capacity this robust and user-friendly drill press is ideal for a busy maintenance workshop or small production factory.

Perfect for fabricators looking for a drill press that's rugged enough to handle the demands of light and medium duty production work and accurate enough to consistently deliver precise results.

2. ASSEMBLY

Fig 1. Column Assembly

1. Place column assembly on base and align holes on column support with holes on base.
2. Secure the column with 4 bolts and washers (provided)

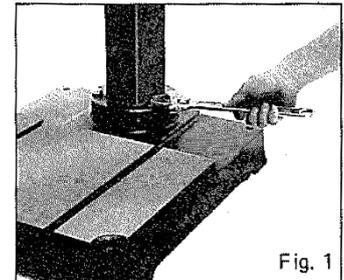


Fig 2. Table Bracket Installation

1. Remove collar and rack
2. Install table bracket and rack

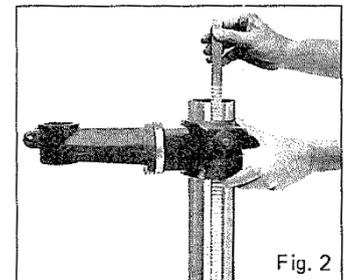


Fig 3. Collar Installation

1. Install collar and tighten firmly

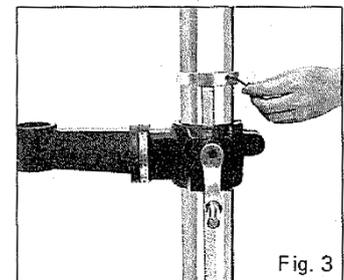


Fig 4. Bracket Installation

1. Install bracket, handle and clamp bolt
2. Tighten handle with attached set screw

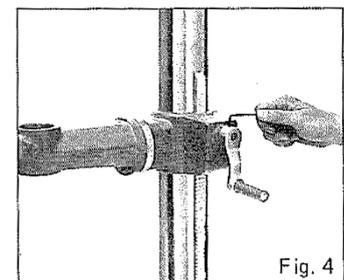


Fig 5.

1. Install clamp bolt to tighten

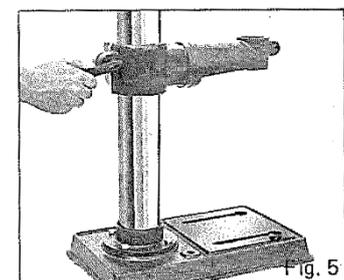


Fig 6.

1. Install table and clamp with bolt (provided)

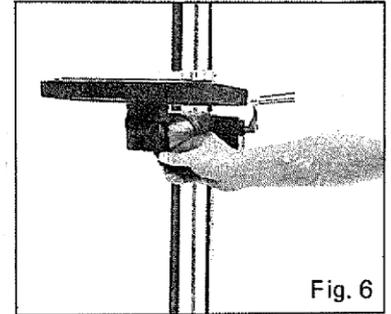


Fig. 6

Fig 7. Head Assembly

1. Position the head assembly over the column and slide into position. Align head frame with table base
2. Fix set screws on right side of head to lock head into position, tighten screws with allen key

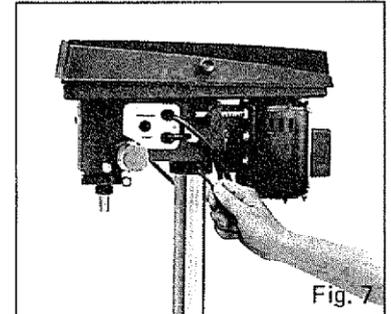


Fig. 7

Fig 8. Feeding Handle Installation

1. Screw knob on each feeding handle, install onto hub of pinion shaft

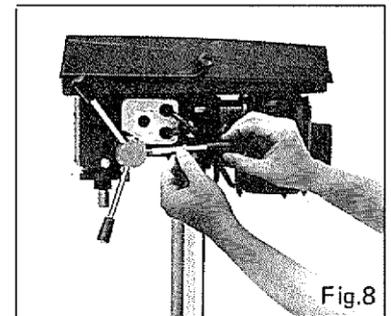


Fig.8

Fig 9. Arbor & Chuck Installation

1. Insert Arbor onto spindle. Pull feed handle down to press arbor into position
2. Open chuck jaws completely by turning attached chuck key counter-clockwise to the end.
3. Place a piece of wood on the table to protect chuck nose

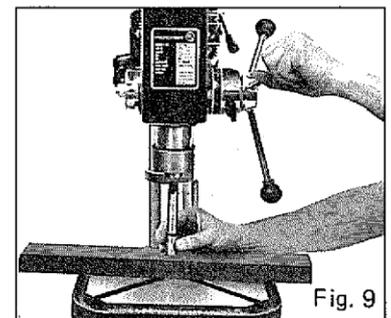


Fig. 9

Fig 10.

1. Install the chuck to the arbor and tighten

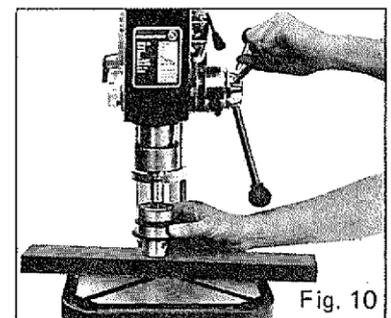


Fig. 10

Fig 11.

1. Install the knob and screw of upper pulley cover

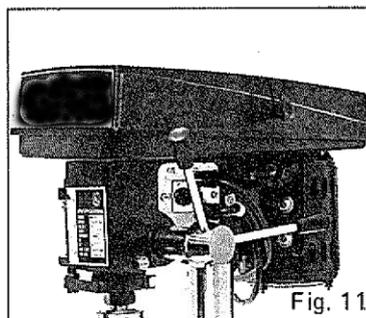


Fig. 11

! Ensure the drill press is firmly fixed in place to table or floor following assembly

Table Adjustment

Fig 12. Height Adjustment

1. To adjust up or down, loosen the clamp bolt to adjust the table the preferred position by turning the table bracket handle

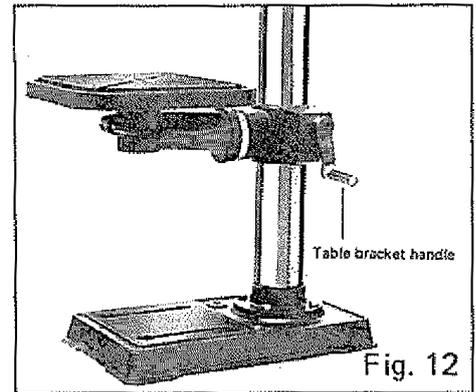


Fig 13. Tilting Adjustment

1. Loosen the table bevel lock bolt with an adjustable wrench
2. Tilt the table to the preferred angle and re-tighten the bolt

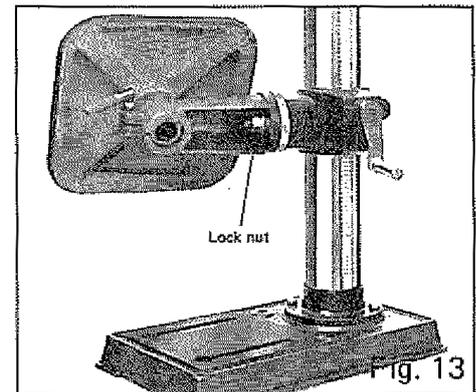


Fig 14. Swing 360°

1. Loosen the clamp bolt and swing table to preferred position, re-tighten clamp bolt


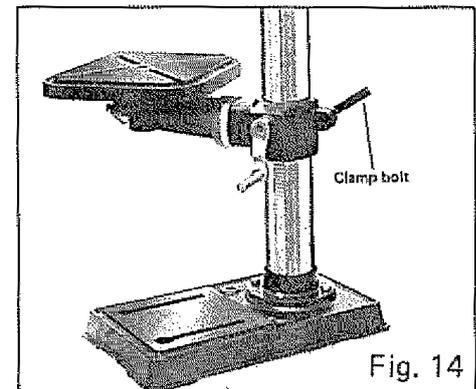


Fig 15 Feed Depth Adjustment



1. Depth control scale sleeve type
2. Loosen the clamp bolt and move to the preferred depth, re-tighten the clamp bolt

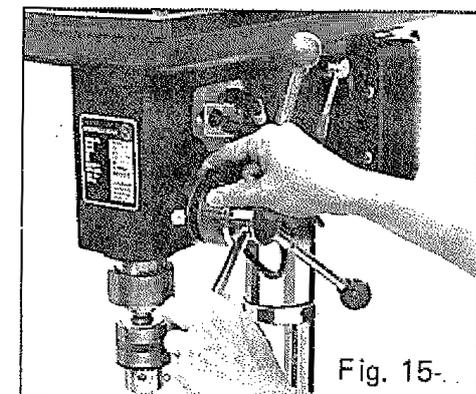

Speed Adjustment

Fig 16-1 Speed Adjustment

1. Open the pulley case and loosen the belt tension lock handle
2. Choose speed for drilling operation and move belt to correct position for preferred speed
3. Push motor backward until moderate belt tension as required.
4. Re-tighten the lock handle. 16-1 & 16-2

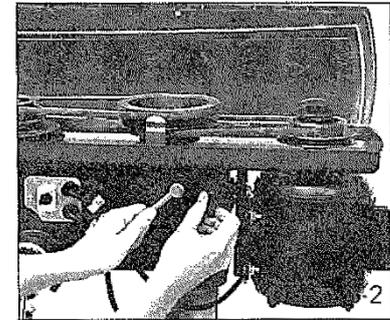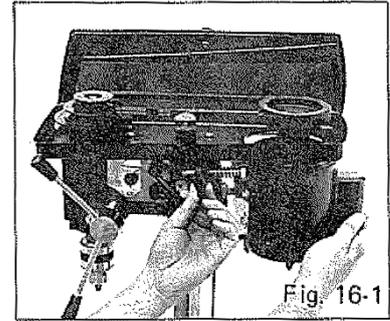


Drilling Speed (Approximately)

| Size Diameter | | Cast Steel | | Tool Steel | | Cast Iron | | Mild Steel | | Alum. & Copper | |
|------------------|------|-------------------------------------|--------|------------|--------|-----------|--------|------------|--------|----------------|--------|
| | | Cutting Speed | | | | | | | | | |
| | | m/min | ft/min | m/min | ft/min | m/min | ft/min | m/min | ft/min | m/min | ft/min |
| | | 12 | 40 | 18 | 60 | 24 | 80 | 30 | 100 | 60 | 200 |
| mm | Inch | Cutting Speed Revolution Per Minute | | | | | | | | | |
| 2 | 1/16 | 1910 | 2445 | 2865 | 3665 | 3820 | 4890 | 4775 | 6110 | 9550 | 12225 |
| 3 | 1/8 | 1275 | 1220 | 1910 | 1835 | 2545 | 2445 | 3185 | 3055 | 6365 | 6110 |
| 5 | 3/16 | 765 | 815 | 1145 | 1220 | 1530 | 1630 | 1910 | 2035 | 3820 | 4075 |
| 6 | ¼ | 610 | 610 | 955 | 915 | 1275 | 1220 | 1590 | 1530 | 3180 | 3055 |
| 8 | 5/16 | 480 | 490 | 715 | 735 | 955 | 980 | 1195 | 1220 | 2390 | 2445 |
| 10 | 3/8 | 380 | 405 | 570 | 610 | 765 | 815 | 955 | 1020 | 1910 | 2035 |
| 11 | 7/16 | 350 | 350 | 520 | 525 | 700 | 700 | 870 | 870 | 1740 | 1745 |
| 13 | 1/2 | 300 | 305 | 440 | 460 | 590 | 610 | 735 | 765 | 1470 | 1530 |
| 16 | 5/8 | 240 | 245 | 360 | 365 | 480 | 490 | 600 | 610 | 1200 | 1220 |
| 19 | 3/4 | 190 | 205 | 285 | 305 | 380 | 405 | 480 | 510 | 955 | 1020 |

Belt Tension Adjustment


Correct belt tension: Use 4.5kg's of hand pressure on the belt as shown below. The distance is 1/2" (13mm) + 10%

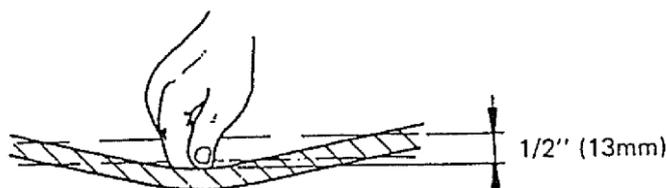

Quill Spring Adjustment

Fig 17 Speed Adjustment

1. Move the stop nuts to the lowest position and lock into place with a wrench to prevent quill dropping while tensioning spring
2. Place screwdriver in lower front notch (A) of spring cap (B) and hold it in place while loosening and removing nuts.
3. Carefully turn screwdriver counter clockwise and engage next notch
4. Tighten inner nut (C) with wrench. DO NOT overtighten as this will restrict quill removal.
5. Move stop nuts to highest position and check tension while turning feed handle. If there isn't enough tension on spring, repeat steps 2 - 4.
6. Check quill while feeding for: Smooth and unrestricted movement. If movement is too tight slightly loosen nuts until unrestricted.

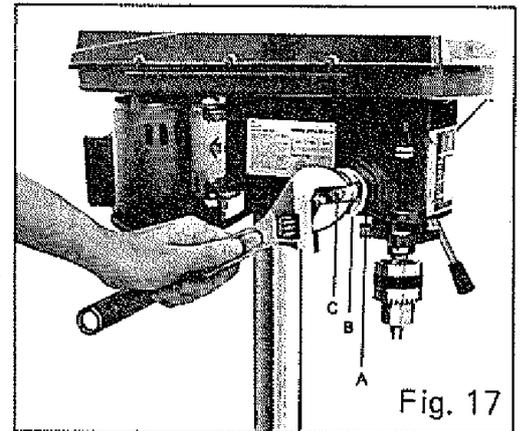

3. BEFORE USE

Prior to each use conduct a visual inspection checking for abnormal conditions, such as cracked welds, leaks, and damaged, loose, or missing parts.

Caution: This drill press is intended for use only with drill bits. The use of other accessories may be hazardous.

Drill Speed: Factors that determine the best speed to use in any drill press operation are:

Type of material being worked on, size of hole, type of drill or cutter and quality of cut desired. The smaller the drill bit, the greater the required RPM. For softer materials, the speed should be higher than firmer material.

Drill Metal: Use clamps to hold work in place when drilling metal. DO NOT hold with hand. The flutes of the drill may seize the work at any time, especially when breaking through stock, causing the work piece to spin.

Clamp: The work must be clamped firmly while drilling: Any tilting, twisting, or shifting results not only in a rough hole, but also increases drill bit breakage. For flat work, lay the piece on a wooden base and clamp firmly down against the table to prevent the work piece from turning. If the piece is of irregular shape and cannot be laid flat on the table, it should be securely blocked and clamped.

Chuck: The chuck should be securely fastened to the spindle. Remove the chuck after adjustment. Only use the chuck key provided by the manufacturer. This chuck key is spring loaded to prevent the chuck key from remaining in the chuck during operation of the drill.

Fixing: Fasten base of drill press to the floor before using to ensure no tipping, sliding of drill press. The set screws of the head frame should be secured tightly before using this machine.

Power: When mounting the motor, ensure the power is disconnected. Connect to power supply protected by a circuit breaker.

Transportation: Lifting by Forklift;

1. If lifting equipment isn't available, use 1ton capacity forklift under the machine base to locate to position
2. To move the drill press safely, place the forks of the forklift at the rear of the drill press – the drill press must only be moved while on a pallet.
3. Keep balance of drill press on pallet while moving with forklift.

4. OPERATION

Fig 18 Installing Drills

1. Insert drill into chuck jaws approx. 1" (25.4mm) long. When using a small drill do not insert too far for the jaws to touch the flutes of the drill. Make sure that the drill is centred in the chuck before tightening the chuck with the key.

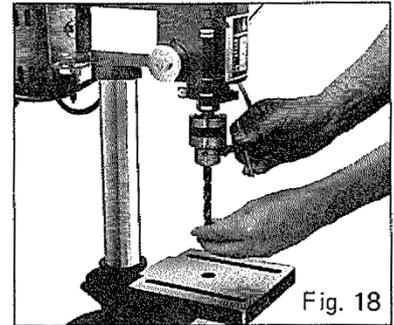


Fig. 18

Fig 19 Workpiece Positioning

1. Always place a piece of wood (or plywood) on the table to prevent "splintering" and/or burrs on the underside of the workpiece as the drill breaks through. Position the wood so that it is in contact with the left side of the column

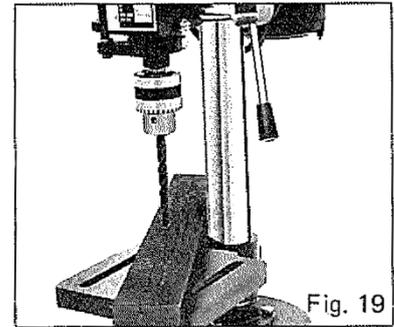


Fig. 19

Vice Positioning

1. For small workpieces that cannot be clamped to the table, use a drill press vice. The vice must be clamped or bolted to the table.

5. INSPECTION

- Prior to each use conduct a visual inspection checking for abnormal conditions, such as cracked welds, leaks, and damaged, loose, or missing parts.
- The drill press shall always be maintained in accordance with the maintenance instructions. No alterations or modifications shall be made to this drill press.
- Inspections shall be performed in accordance with this owner's manual.
- The drill press must be inspected immediately if it is believed to have been subjected to abnormal load or shock.
- Owners and /or operators should be aware that repair of this product may require specialised equipment and knowledge (refer to maintenance section).

6. STORAGE

This drill press should always be stored in a dry location on a level surface with the power switched off.

7. MAINTENANCE

1. DISCONNECT Drill Press before performing any maintenance
2. FREQUENTLY blow out any dust that may accumulate inside the motor
3. APPLY a coat of automobile type wax or similar to the table and column to keep surface clean
4. LUBRICATION; all the ball bearings are packed with grease at the factory. They require no further lubrication
5. PERIODICALLY lubricate the gear and rack table elevation mechanism, the splines (grooves) in the spindle and the rack (teeth on the quill)
6. Only use replacement parts that are approved by the manufacturer.
7. Regularly clean all surfaces and maintain all labels and warnings.


8. SERVICE & REPAIR

Any Borum Industrial Drill Press found damaged in any way, or found to be worn or operates abnormally should be removed from service until repaired by an authorised service agent. Owners and / or operators should be aware that repair of this product may require specialised equipment and knowledge. Only authorised parts, labels, decals shall be used on this equipment. Annual inspection of the drill press is recommended and can be made by an authorised repair facility to ensure that your equipment is in optimum condition and that the equipment has the correct decals and safety labels specified by the manufacturer.

PARTS LIST

| Part | Description | QTY | Part | Description | QTY | Part | Description | QTY |
|------|-----------------------|-----|------|-------------------------|-----|------|---------------------|-----|
| 1 | Pulley cover | 1 | 30 | Tension adj. block | 1 | 62 | Knob | 1 |
| 1-1 | Label | 1 | 31 | Machine head | 1 | 63 | Handle bar | 1 |
| 2 | Spindle pulley | 1 | 31-1 | Label | 2 | 64 | Rack collar | 1 |
| 2-1 | Nut | 1 | 32 | Set screw | 1 | 65 | Screw | 1 |
| 3 | V-Belt | 1 | 33 | Snap ring | 1 | 66B | Column | 1 |
| 4 | Knob | 1 | 34 | Motor tension adj lever | 2 | 66BF | Column | 1 |
| 4-1 | Screw | 1 | 35 | Screw | 1 | 67B | Rack | 1 |
| 5 | Centre pulley | 1 | 36 | Snap ring | 1 | 67BF | Rack | 1 |
| 6 | Bearing | 1 | 37 | Motor bracket | 1 | 68 | Clamp bolt | 1 |
| 7 | Bearing | 1 | 38 | Motor bracket | 4 | 69 | Table bracket | 1 |
| 8 | Snap ring | 1 | 39 | Cable bushing | 4 | 69-1 | Angle scale | 1 |
| 9 | Set screw | 1 | 40 | Spring washer | 4 | 70 | Gear | 1 |
| 10 | V-Belt | 1 | 41 | Hex nut | 1 | 71 | Worm gear | 1 |
| 11 | Motor pulley | 1 | 42 | Hex screw | 1 | 72 | Shaft | 1 |
| 12 | Centre pulley bracket | 1 | 43 | Motor mounting plate | 4 | 73 | Table bracket screw | 1 |
| 13 | Screw | 4 | 44 | Motor | | 73-1 | Screw | 1 |
| 14 | Cable bushing | 2 | 45 | Nut / Face washer | | 74 | Table arm | 1 |
| 15 | Cable clip | 1 | 46 | Wiring box | 1 | 74-1 | Zero mark | 1 |
| 16 | Cable & plug | 1 | 47 | Rubber pad | 1 | 75 | Screw | 1 |
| 16-1 | Motor cable | 1 | 48 | Snap ring | 1 | 76 | Clamp bolt | 1 |
| 17 | Driving taper sleeve | 1 | 49 | Ball bearing | 1 | 77 | Spring washer | 1 |
| 18 | Circlip | 2 | 50 | Rubber spacer | 1 | 78 | Hex screw | 1 |
| 19 | Ball bearing | 2 | 51 | Quill | 1 | 79 | Table | 1 |
| 20 | Switch | 1 | 52 | Ball bearing | 1 | 80B | Flange | 1 |
| 20-1 | Screw | 3 | 53 | Chuck guard | 1 | 80BF | Flange | 1 |
| 22 | Switch box | 1 | 54 | Spindle | 1 | 81 | Hex screw | 4 |
| 23 | Screw | 3 | 55 | Wedge | 1 | 82 | Spring washer | 4 |
| 24 | Cable bushing | 1 | 56 | Arbor | 1 | 83B | Base | 1 |
| 25 | Set screw | 1 | 57 | Chuck | 1 | 83BF | Base | 1 |
| 26 | Nut | 1 | 58 | Chuck key | 1 | | | |
| 27 | Nut | 1 | 59 | Set screw | 1 | | | |
| 28 | Spring & cap | 1 | 60 | Scale sleeve | 1 | | | |
| 29 | Set screw | 1 | 61 | Pinion shaft | 1 | | | |

PARTS DIAGRAM

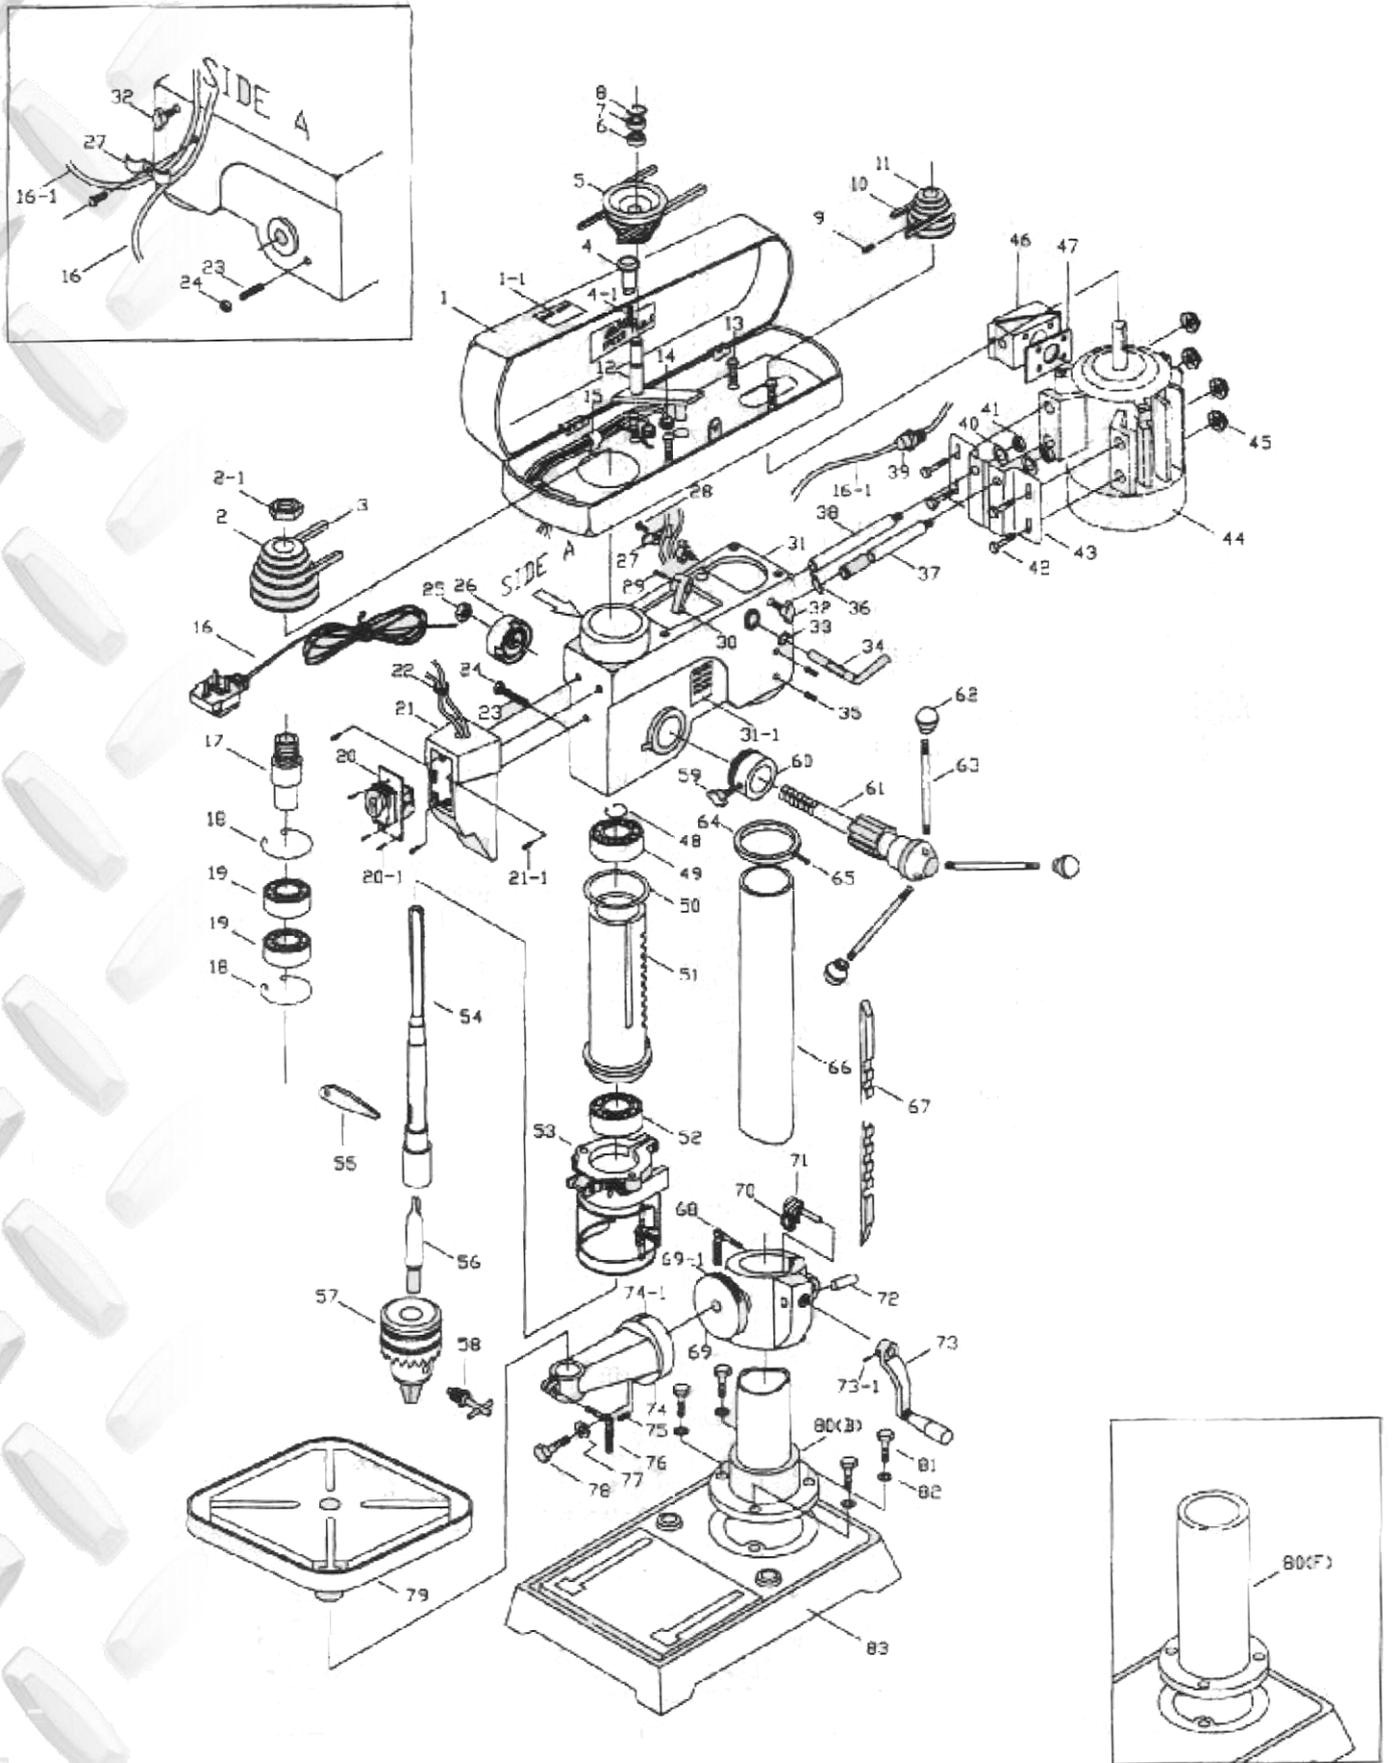

TROUBLESHOOTING

| PROBLEM | POSSIBLE CAUSE | REMEDY |
|--------------------------|--|---|
| Noisy Operation | <ul style="list-style-type: none"> • Incorrect belt tension • Dry spindle • Loose pulley • Loose belt • Bad bearing | <ul style="list-style-type: none"> • Adjust tension • Remove spindle/quill assembly & lubricate • Tighten pulley • Adjust belt tension • Replace bearing |
| Excessive drill wobble | <ul style="list-style-type: none"> • Loose chuck • Worn spindle shaft or bearing • Bad chuck | <ul style="list-style-type: none"> • Tighten by pressing chuck down against table • Replace spindle shaft or bearing • Replace chuck |
| Motor won't start | <ul style="list-style-type: none"> • Power supply • Motor connection • Switch connections • Motor windings burnt • Bad switch | <ul style="list-style-type: none"> • Check power cord • Check motor connections • Check switch connections • Replace motor • Replace switch |
| Drill binds in workpiece | <ul style="list-style-type: none"> • Excessive pressure on feed handle • Loose belt • Loose drill • Speed too fast | <ul style="list-style-type: none"> • Apply less pressure • Check belt tension • Tighten drill with key • Change speed |
| Drill burns or smokes | <ul style="list-style-type: none"> • Incorrect speed – reduce RPM • Fillings caught in drill bit • Poor drilling • Incorrect feed pressure | <ul style="list-style-type: none"> • Refer to RPM sheet • Clean drill bit • Sharpen drill bit or replace drill bit • Apply less pressure |
| Table difficult to raise | <ul style="list-style-type: none"> • Needs lubrication • Bent rack • Table lock too tight | <ul style="list-style-type: none"> • Lubricate with a light oil • Straighten rack • Loosen clamp |

WARRANTY

BORUM Industrial products have been carefully tested and inspected before shipment and are guaranteed to be free from defective materials and workmanship for a period of 12 months from the date of purchase except where tools are hired out when the guarantee period is ninety days from the date of purchase.

Should this piece of equipment develop any fault, please return the complete tool to your nearest authorised warranty repair agent or contact TQB Brands Pty Ltd Warranty team – warranty@tqbbrands.com.au.

If upon inspection it is found that the fault occurring is due to defective materials or workmanship, repairs will be carried out free of charge. This guarantee does not apply to normal wear and tear, nor does it cover any damage caused by misuse, careless or unsafe handling, alterations, accident, or repairs attempted or made by any personnel other than the authorised TQB Brands Pty Ltd repair agent.

This guarantee applies in lieu of any other guarantee expressed or implied and variations of its terms are not authorised.

Your TQB Brands Pty Ltd guarantee is not effective unless you can produce upon request a dated receipt or invoice to verify your proof of purchase within the 12month period.

Consumer Guarantee

Our goods come with a guarantee that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.



All images and illustrations shown are for reference purposes only. All information, specifications and illustrations in this manual are based on the latest information available at the time of publication and are subject to change without notice. The information in this manual is periodically revised to ensure the latest information is included. Download the latest version of this manual and other related technical documentation from www.tqbbrands.com.au